


Custom Gear Capabilities




Gear Cutting and Finishing

- Hobbing and shaping
- Spiral bevel and straight bevel cutting
- Broaching and rolling
- Internal and external grinding
- Surface and gear-tooth grinding
- Advanced CBN grinding
- Multiaxis machining
- Drilling, milling, tapping and sawing

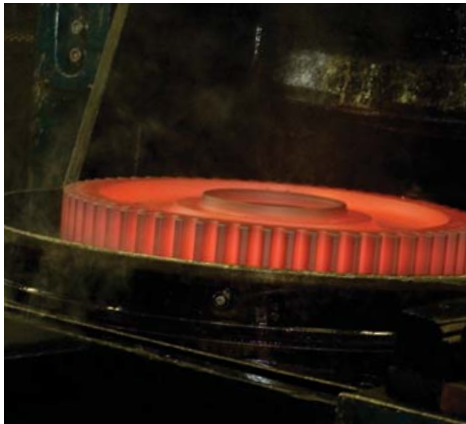

Heat Treating

- Carburizing
- Induction hardening
- Through hardening
- Nitriding
- Shot peening
- Oil/press quenching

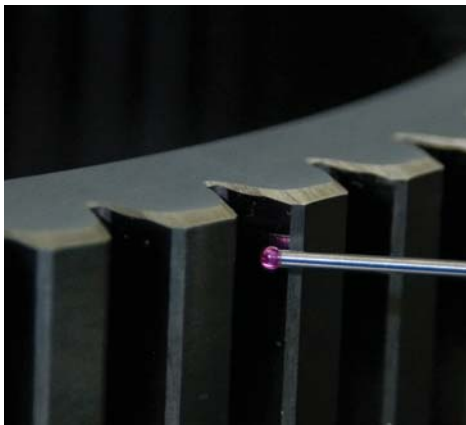

Quality and Testing

- Highly advanced CNC inspection technology
- Gear quality certification to AGMA Class 14
- Comprehensive lab and field testing



Service and Support

- Extensive sales/applications training
- Experienced customer service staff
- Industry-leading delivery
- Scheduling flexibility
- Global parts and service network



oerlikon
fairfield

Oerlikon Fairfield
U.S. 52 South
P.O. Box 7940
Lafayette, Indiana 47903-7940 USA
765.772.4000
765.772.4001 (fax)
fairfieldmfg.com

oerlikon
graziano

Oerlikon Graziano
Via Cumiana, 14
10098 Cascine Vica – Rivoli
Torino Italy
+39 011 9570 1
+39 011 958 4803 (fax)
grazianotrasmissioni.it

Hypoid® and Zerol® are registered trademarks of Gleason.

☛ Lafayette IN 108 PAR 1.5M



One Source. Countless Solutions.

Since 1919, original equipment manufacturers across the globe have relied on Oerlikon Fairfield for its fully integrated custom gear production capabilities that deliver superior value in a diverse world of applications.


Whether you need a contract manufacturer that can build precisely to your print or a motion technology expert capable of solving your most complex gear-performance issues, Oerlikon Fairfield is here to serve.

Oerlikon Fairfield's custom gear capabilities include:

- External and internal, spur and helical gears and pinions
- Straight and spiral bevel gears and pinions
- Precision-ground gears
- High-speed gears
- Planetary gear drives
- Hypoid® and Zerol® gears and pinions
- Plain, keyed, splined, flanged or spur shafts
- Tapered serrations

Oerlikon Fairfield has more than 50 engineers on staff conducting:

- Finite Element Analysis
- CAD/Solids Modeling
- Extensive metallurgical testing
- Thorough failure analysis of gears and complete gear assemblies
- Product-performance testing in lab and field environments
- Application testing in the field through histogram retrieval

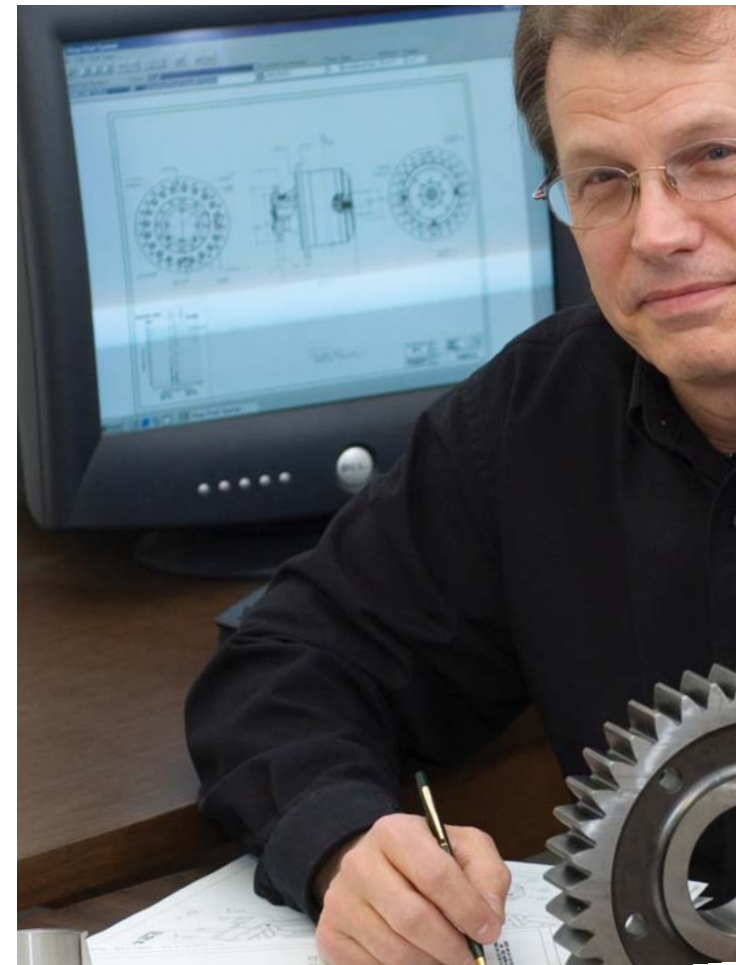

Custom Gears Capabilities



Gear Cutting Capabilities

Gear Cutting Type	Diametral Pitch (Module)	Diameter Inch (mm)	Face Width Inch (mm)
External Spur	20 to 0.5 (1.3 to 50)	.5 to 80 (12 to 2,000)	.25 to 24 (6 to 610)
External Helical	20 to 0.5 (1.3 to 50)	.5 to 80 (12 to 2,000)	.25 to 24 (6 to 610)
Internal Spur	20 to 1 (1.5 to 25)	3 to 100 (75 to 2,540)	.5 to 18 (12 to 460)
Internal Helical	20 to 1 (1.3 to 25)	3 to 100 (75 to 2,540)	.5 to 18 (12 to 460)

Gear Cutting Capabilities

Gear Cutting Type	Diametral Pitch (Module)	Diameter Inch (mm)	Length Inch (mm)
Splined & Spur Shaft	64 to 1.5 (.4 to 17)	.375 to 20 (10 to 500)	1 to 100 (25 to 2,540)
Internal Spline	64 to 1.5 (.4 to 17)	.375 to 50 (10 to 1,270)	.25 to 13 (6 to 330)
Tapered Serrations	--	1 to 7 (25 to 175)	--

Gear Cutting Capabilities

Gear Cutting Type	Diametral Pitch (Module)	Diameter Inch (mm)	Pinion Hd. Brg. Dia. Inch (mm)
Straight Bevel	16 to 1.25 (1.6 to 20)	1 to 36 (25 to 915)	6.5 (165)
Spiral Bevel	16 to 1.10 (1.6 to 23)	1 to 36 (25 to 915)	8.5 (216)
Hypoid Bevel	12 to 1.10 (2.1 to 23)	1 to 36 (25 to 915)	8.5 (216)
Zerol Gear	16 to 1.10 (1.6 to 23)	1 to 36 (25 to 915)	8.5 (216)



Heat Treatment Capabilities

Process Type	Max. Outside Dia. Inch (mm)	Max. Height Inch (mm)	Max. Length Inch (mm)
Carburized Free Quench	36 (915)	36 (915)	84 (2,130)
Carburized Press Quench	36 (915)	12 (305)	--
Nitride	60 (1,524)	60 (1,524)	60 (1,524)
Induction Hardening	80 (2,000)	28 (700)	100 (2,540)
Through Hardening	60 (1,524)	18 (460)	84 (2,130)
Normalize/Anneal	40 (1,016)	48 (1,220)	70 (1,780)
Cold Treat	60 (1,524)	48 (1,220)	74 (1,880)



Machining & Finishing Capabilities

Type	Max. Diameter Inch (mm)	Max. Length Inch (mm)
Turning	92 (2,350)	120 (3,048)
O.D. Grinding	48 (1,220)	110 (2,794)
I.D. Grinding	48 (1,220)	--

Machining & Finishing Capabilities

Type	Max. Area Inch (mm)	Features
Machining Center	97 x 78 x 196 (2,478 x 2,000 x 5,000)	3 to 5 Axis
Shot Peen	40 x 24 x 84 (1,016 x 610 x 2,130)	Internal & External Gears
Painting	28 x 28 x 72 (700 x 700 x 1,020)	Solvent Based

Machining & Finishing Capabilities

Type	Diametral Pitch (Module)	Max. Diameter Inch (mm)	Max. Face Width Inch (mm)
Gear Shaving, Ext.	16 to 2.5 (1.5 to 10)	24 (610)	6 (150)
Gear Honing, Ext.	16 to 2.5 (1.5 to 10)	24 (610)	5 (125)
Spline Rolling	64 to 12 (.4 to 2)	3.625 (90)	4.75 (120)

Machining & Finishing Capabilities

Type	Max. Diameter Inch (mm)	Max. Length Inch (mm)	Weight Pounds (kg)
Dynamic Balancing	30 (762)	96 (2,440)	20 to 2,500 (10 to 1,100)



Gear Grinding Capabilities

Gear Grinding Type	Diametral Pitch (Module)	Diameter Inch (mm)	Face Width Inch (mm)	Length Inch (mm)
External Spur & Helical	20 to 0.5 (1.3 to 50)	1 to 80 (25 to 2,000)	.25 to 24 (6 to 610)	--
Internal Spur	20 to 0.5 (1.3 to 50)	5 to 80 (130 to 2,000)	.5 to 18 (12 to 460)	--
Splined & Spur Shaft	20 to 1 (1.3 to 25)	1 to 20 (25 to 500)	1 to 19 (25 to 480)	1 to 84 (25 to 2,133)